

Basic Range

BF1-O- Overfrequency Relay

Application

Overfrequency supervision of 1 or 3 phase systems.

Function

The unit BF1-O is equipped with an overfrequency supervision ($f>$) with adjustable pick-up values and trip delays. The measured frequency is continuously compared with the set reference values.

For frequency supervision the cycle duration is evaluated and so measuring is virtually independent on harmonics. To avoid tripping, during normal operation due to interference voltages, a fixed measuring repetition is used.

Technical data

Rated voltage Un	: 110 V, 230 V, 400 V AC
frequency range at	
50 Hz rated frequency	: 50 - 54 Hz
60 Hz rated frequency	: 60 - 64.8 Hz
Tolerance	: $\pm 1\%$ of rated frequency
Hysteresis	: 0.5 % of rated frequency
power consumption	: 3.7 VA
Thermal load carrying capacity	: continuously $1.3 \times Un$
Returning time	: 250 ms
Minimum operating time	: 250 ms

Output relay

Maximum breaking capacity ohmic	: 1250 VA AC/120 W DC
Inductive	: 500 VA AC/75 W DC
Rated current	: 5 A
Making current	: 20 A

System data

Regulations	: VDE 0435 part 303
Temperature range at storage and operation	: -25°C to +70°C

Mechanical stress

Shock	: Class 1 acc. to DIN IEC 255-21-2
Vibration	: Class 1 acc. to DIN IEC 255-21-1
Degree of protection unit front	: IP 40 at closed front cover
Weight	: Approx. 0.5 kg
Mounting position	: Any

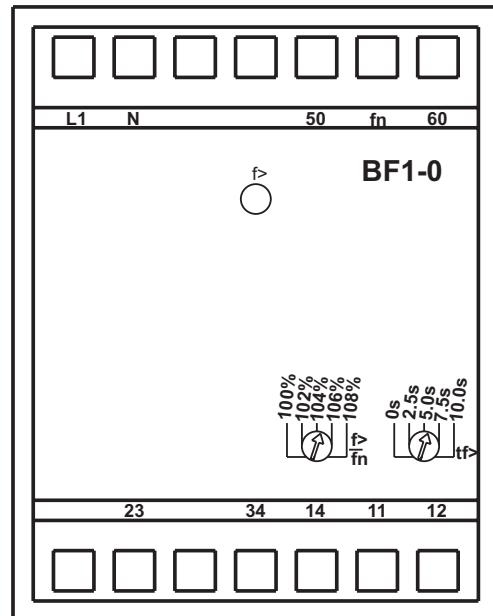


Fig. 1 : Front plate

The unit BF1-O is designed to be fastened onto a DIN rail acc. to DIN EN 50022 same as all units of the BASIC RANGE.

The front plate of the unit is protected with a sealable transparent cover (IP40).

Please remove the transparent cover at the appropriate openings with a screw drive to adjust the relay.

LEDs

LED $f>$ indicates pick-up of the relay by flashing.

LED $f>$ indicates tripping at overfrequency (steady light)


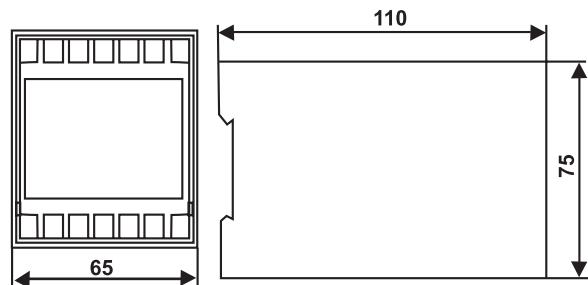


Fig. 2 : Dimensional drawing BF1-O


Auxiliary voltage supply

Unit BF1-O needs no separate auxiliary voltage supply. The supply voltage can be formed directly from the measuring quantity.

A) 3 wire system 110 V

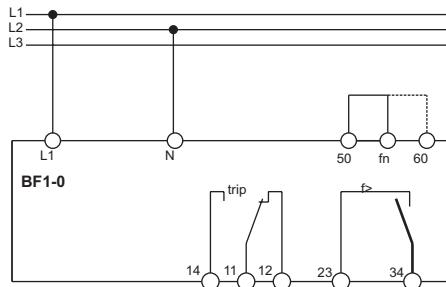

B) 4 wire system 230 V

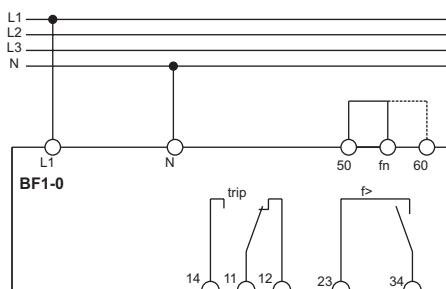

C) 3 wire system 400 V

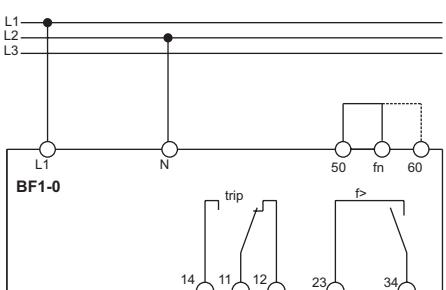


Fig. 3. Connection diagram

System	Relay type	Conection diagram
3 Phase 110 V	BF1-O-110	A
3 Phase 230 V with N	BF1-O-230	B
3 Phase 400 V	BF1-O-400	C

C&S Electric Limited


(Protection & Control Division)

44, Okhla Industrial Estate, New Delhi -110 020 (INDIA)
 Phone : +91 11- 66602414, 30883745/54/64 Fax: +91 11- 66602413
 E-mail: cspc@cselectric.co.in Web : www.cselectric.co.in

Marketing Offices :

AHMEDABAD: +91 79 30074534/35/36 FAX : +91 79 30074519 **BANGALORE:** +91 80 25586147, 25594939 FAX : +91 25584839
BHUBANESWAR : +91 674 2507265 FAX : +91 674 2507265 **CHANDIGARH :** +91 172 272613, 3062624 FAX : +91 172 2726153
CHENNAI : +91 44 39180531/32/33/34 FAX : +91 44 39180514 **DELHI :** +91 11 30838822-25 FAX : +91 11 30838826 **HYDERABAD :** +91 40 27813003
 FAX : +91 40 27812987 **KOLKATA :** +91 33 22275850/51 FAX : +91 33 22275849 **MUMBAI :** +91 22 24114727/28 FAX : +91 22 24126631
NAGPUR : +91 712 5616651 FAX : +91 712 5616651 **PUNE :** +91 20 30283244/45 FAX : +91 20 30283245 **RAIPUR :** +91 771 320852433/34

Operation without a fault

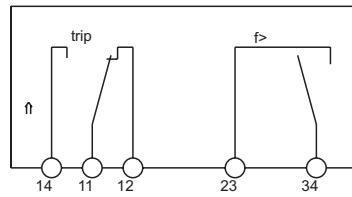

Overfrequency

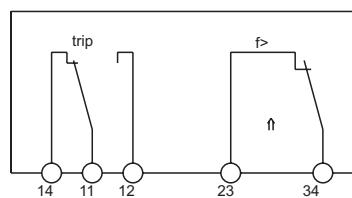


Fig. 4: Contact positions

Connecting terminals

The connection up to a maximum of $2 \times 2.5 \text{ mm}^2$ cross-section conductors is possible. For this procedure the transparent cover of the unit has to be removed.

Setting ranges

f> : 100 - 108 % fn
 ff> : 0 - 10 s

Order key

BF1-O	
110 V AC	110
230 V AC	230
400 V AC	400